

KTDC-A

Series Bottom Sealing Shopping Bag Making Machine



Feature:

This Bottom Sealing Shopping Bag Making Machine is suitable for making t-shirt bags (vest bags) flat bags (D-cutting bags), which widely used in the shopping market.

Main Technical Specification

Model	KTDC-A
Production line	1 line / 2 lines / 4 lines / 6 lines
Sealing Way	Hot Sealing Cold Cutting
Bag Type	D-cutting Bag, T-shirt bag.
Material	HEPE, LDPE
Material Width	600-1500mm
Max. Bag Width	550-1450mm
Max. Bag Height	1500mm
Bag Making Speed	30-180pcs/min
Machine Power	3.5kw
Machine Weight	650kg
Machine Size (LWH)	3300 × 1040 × 1600mm

Performance and Characteristics:

1. Making Hot Sealing Cold Cutting T Shirt Bag and Flat Bag.
2. With Microcomputer Control System.
3. Material Feeding by Stepping Motor.
4. With Length Control System.
5. With Automatic Counting System.
6. With Sealing Knife Temperature Control System.
7. With Photo Sensor Checking System.
8. Production Line Optional: 2lines, 4lines, 6lines, 8lines machine.
9. Optional: Auto Puncher.
10. Optional: Rewind Table.

KTDC-BM

Series Coreless Bag on Roll Garbage Bag Making Machine



Feature:

This coreless bag on roll garbage bag making machine is designed to convert plastic films into coreless plastic bag rolls. Such as Plastic Garbage bags, Trash bags, and disposable bags. Each bag on the roll is individually folded and sealed. After a strong bottom sealing, the bags are cut by the perforation knife to ensure the bags can be torn off easily.

Performance and Characteristics:

1. With Double Servo Control System.
2. With Length Control System.
3. With Auto Counting System.
4. With PLC Touch Screen Control System.
5. With Auto Roll Bag Change System.

Main Technical Specification

Model	KTDC-BM300X2	KTDC-BM 450X2
Raw Material	HDPE, LDPE, Biodegradable Films, Recycle Materials	
Finial Products	Coreless Bag on Roll (T Shirt Bag, Flat Bag, S Shape Bag)	
Production Line	2 Lines	2 Lines
Max. Unwind Diameter	900 mm	900 mm
Bag Making Height	300-1500 mm	300-1500 mm
Ma. Finished Roll Width	100 -200 mm	150 -300 mm
Max. Finished Roll Diameter	150mm	160mm
Raw Material Thickness	7-25 micron/layer	7-25 micron/layer
Bag Making Speed	(50-150 bags/min) x 2	(50-150 bags/min) x 2
Material Feeding Speed	80-100m/min	80-100m/min
Machine Power	12kw	14kw
Air Compressor	4HP	5HP
Machine Weight	2800kg	3000kg
Machine Size (LWH)	7200 x 2200 x 1800mm	7200 x 2400 x 1800mm

KTDC-BF

Series Coreless Flat Bag on Roll Garbage Bag Machine



Feature:

This coreless bag on roll garbage bag machine is designed to convert plastic films into coreless plastic bag rolls. Such as Plastic Garbage bags, Trash bags, and disposable bags. Each bag on the roll is individually folded and sealed. After a strong bottom sealing, the bags are cut by the perforation knife to ensure the bags can be torn off easily.

Performance and Characteristics:

1. With Double Servo Control System.
2. With Length Control System.
3. With Auto Counting System.
4. With PLC Touch Screen Control System.
5. With Auto Roll Bag Change System.

Main Technical Specification

Model	KTDC-BF 300X2	KTDC-BF 450X2
Raw Material	HDPE, LDPE, Biodegradable Films, Recycle Materials	
Final Products	Start Seal Coreless Bag on Roll (Flat Bag)	
Production Line	2 Lines	2 Lines
Max. Finished Roll Width	100 -200 mm	150 -300 mm
Max. Finished Roll Diameter	150mm	150mm
Bag Making Height	300 - 1000 mm	300 - 1000 mm
Raw Material Thickness	7-25micron/layer	7-25micron/layer
Bag Making Speed	(50-200 bags/min) x 2	(50-200 bags/min) x 2
Material Feeding Speed	80-100m/min	70-90m/min
Air Compressor	3HP	3HP
Machine Power	13kw	14kw
Machine Weight	2800kg	3000kg
Machine Size (LWH)	6000 x 2400 x 1500mm	6000 x 2600 x 1500mm

KTDC-BV

Series V Fold Coreless Coreless Garbage Poly Bag Making Machine



Feature:

This Coreless Garbage Poly Bag Machine is designed to convert plastic films into coreless V fold plastic bag rolls. Such as Plastic Garbage bags, Trash bags, and disposable bags. Each bag on the roll is individually folded and sealed. After a strong bottom sealing, the bags are cut by the perforation knife to ensure the bags can be torn off easily.

Performance and Characteristics:

1. With Double Servo Control System.
2. With Length Control System.
3. With Auto Counting System.
4. With PLC Touch Screen Control System.
5. With Auto Roll Bag Change System.

Main Technical Specification

Model	KTDC-BV 700	KTDC-BV 900	KTDC-BV 1200
Raw Material	HDPE, LDPE, Biodegradable Films, Recycle Materials		
Finial Products	V Fold Coreless Bag on Roll (Flat Bag)		
Production Line	1 Line	1 Line	1 Line
Max. Raw Material Width	600mm	850mm	1100mm
Bag Making Height	300-1500 mm	300-1500 mm	300-1500 mm
Max. Finished Roll Width	350mm	450mm	550mm
Max. Finished Roll Diameter	120mm	120mm	120mm
Raw Material Thickness	7-35 micron/layer	7-35 micron/layer	7-35 micron/layer
Bag Making Speed	50-200 bags/min	50-160 bags/min	50-120 bags/min
Material Feeding Speed	80-100m/min	60-90m/min	50-80m/min
Air Compressor	3HP	3HP	4HP
Machine Power	12kw	13kw	14kw
Machine Weight	2800kg	3200kg	3800kg
Machine Size (LWH)	7000 x 2000 x 1900mm	7500 x 2000 x 2100mm	7500 x 2200 x 2400mm

Model	KTDC-BV 450X2
Raw Material	HDPE, LDPE, Biodegradable Films, Recycle Materials
Finial Products	V Fold Coreless Bag on Roll
Production Line	2 Lines
Ma. Raw Material Width	400 mm
Bag Making Height	200-1000 mm
Max. Rewind Roll Width	200 mm
Max. Rewind Roll Diameter	150mm
Raw Material Thickness	7-25 Micron/Layer
Bag Making Speed	(50-200 bags/min) x 2
Material Feeding Speed	80-100m/min
Air Compressor	5HP
Machine Power	15kw
Machine Weight	3500kg
Machine Size (LWH)	6000 x 2400 x 1900mm

KTDC-B2V

Series Coreless Double V Fold Garbage Poly Bag Machine



Feature:

This Coreless Garbage Poly Bag Machine is designed to convert plastic films into coreless V fold plastic bag rolls. Such as Plastic Garbage bags, Trash bags, and disposable bags. Each bag on the roll is individually folded and sealed. After a strong bottom sealing, the bags are cut by the perforation knife to ensure the bags can be torn off easily.

Performance and Characteristics:


1. With Servo Control System.
2. With Length Control System.
3. With Auto Counting System.
4. With PLC Touch Screen Control System.
5. With Auto Roll Bag Change System.

Main Technical Specification

Model	KTDC-B2V 700	KTDC-B2V 900	KTDC-B2V 1200
Raw Material	HDPE, LDPE, Biodegradable Films, Recycle Materials		
Finial Products	Double V Fold Coreless Bag on Roll		
Production Line	1 Line	1 Line	1 Line
Max. Raw Material Width	600mm	850mm	1100mm
Bag Making Height	300-1500 mm	300-1500 mm	300-1500 mm
Max. Finished Roll Width	350mm	450mm	550mm
Max. Finished Roll Diameter	160mm	160mm	160mm
Raw Material Thickness	7-55 Micron / Layer	7-55 Micron / Layer	7-55 Micron / Layer
Bag Making Speed	50-200bags/min	50-160 bags/min	50-120 bags/min
Material Feeding Speed	80-100m/min	70-90m/min	50-70m/min
Air Compressor	4HP	5HP	5HP
Machine Power	14kw	16kw	18kw
Machine Weight	2800kg	3200kg	3800kg
Machine Size (LWH)	6500 x 2400 x 1900mm	7000 x 2400 x 1900mm	7500 x 2500 x 2200mm

KTDC-BC

Series Coreless C Fold Garbage Bag Making Machine

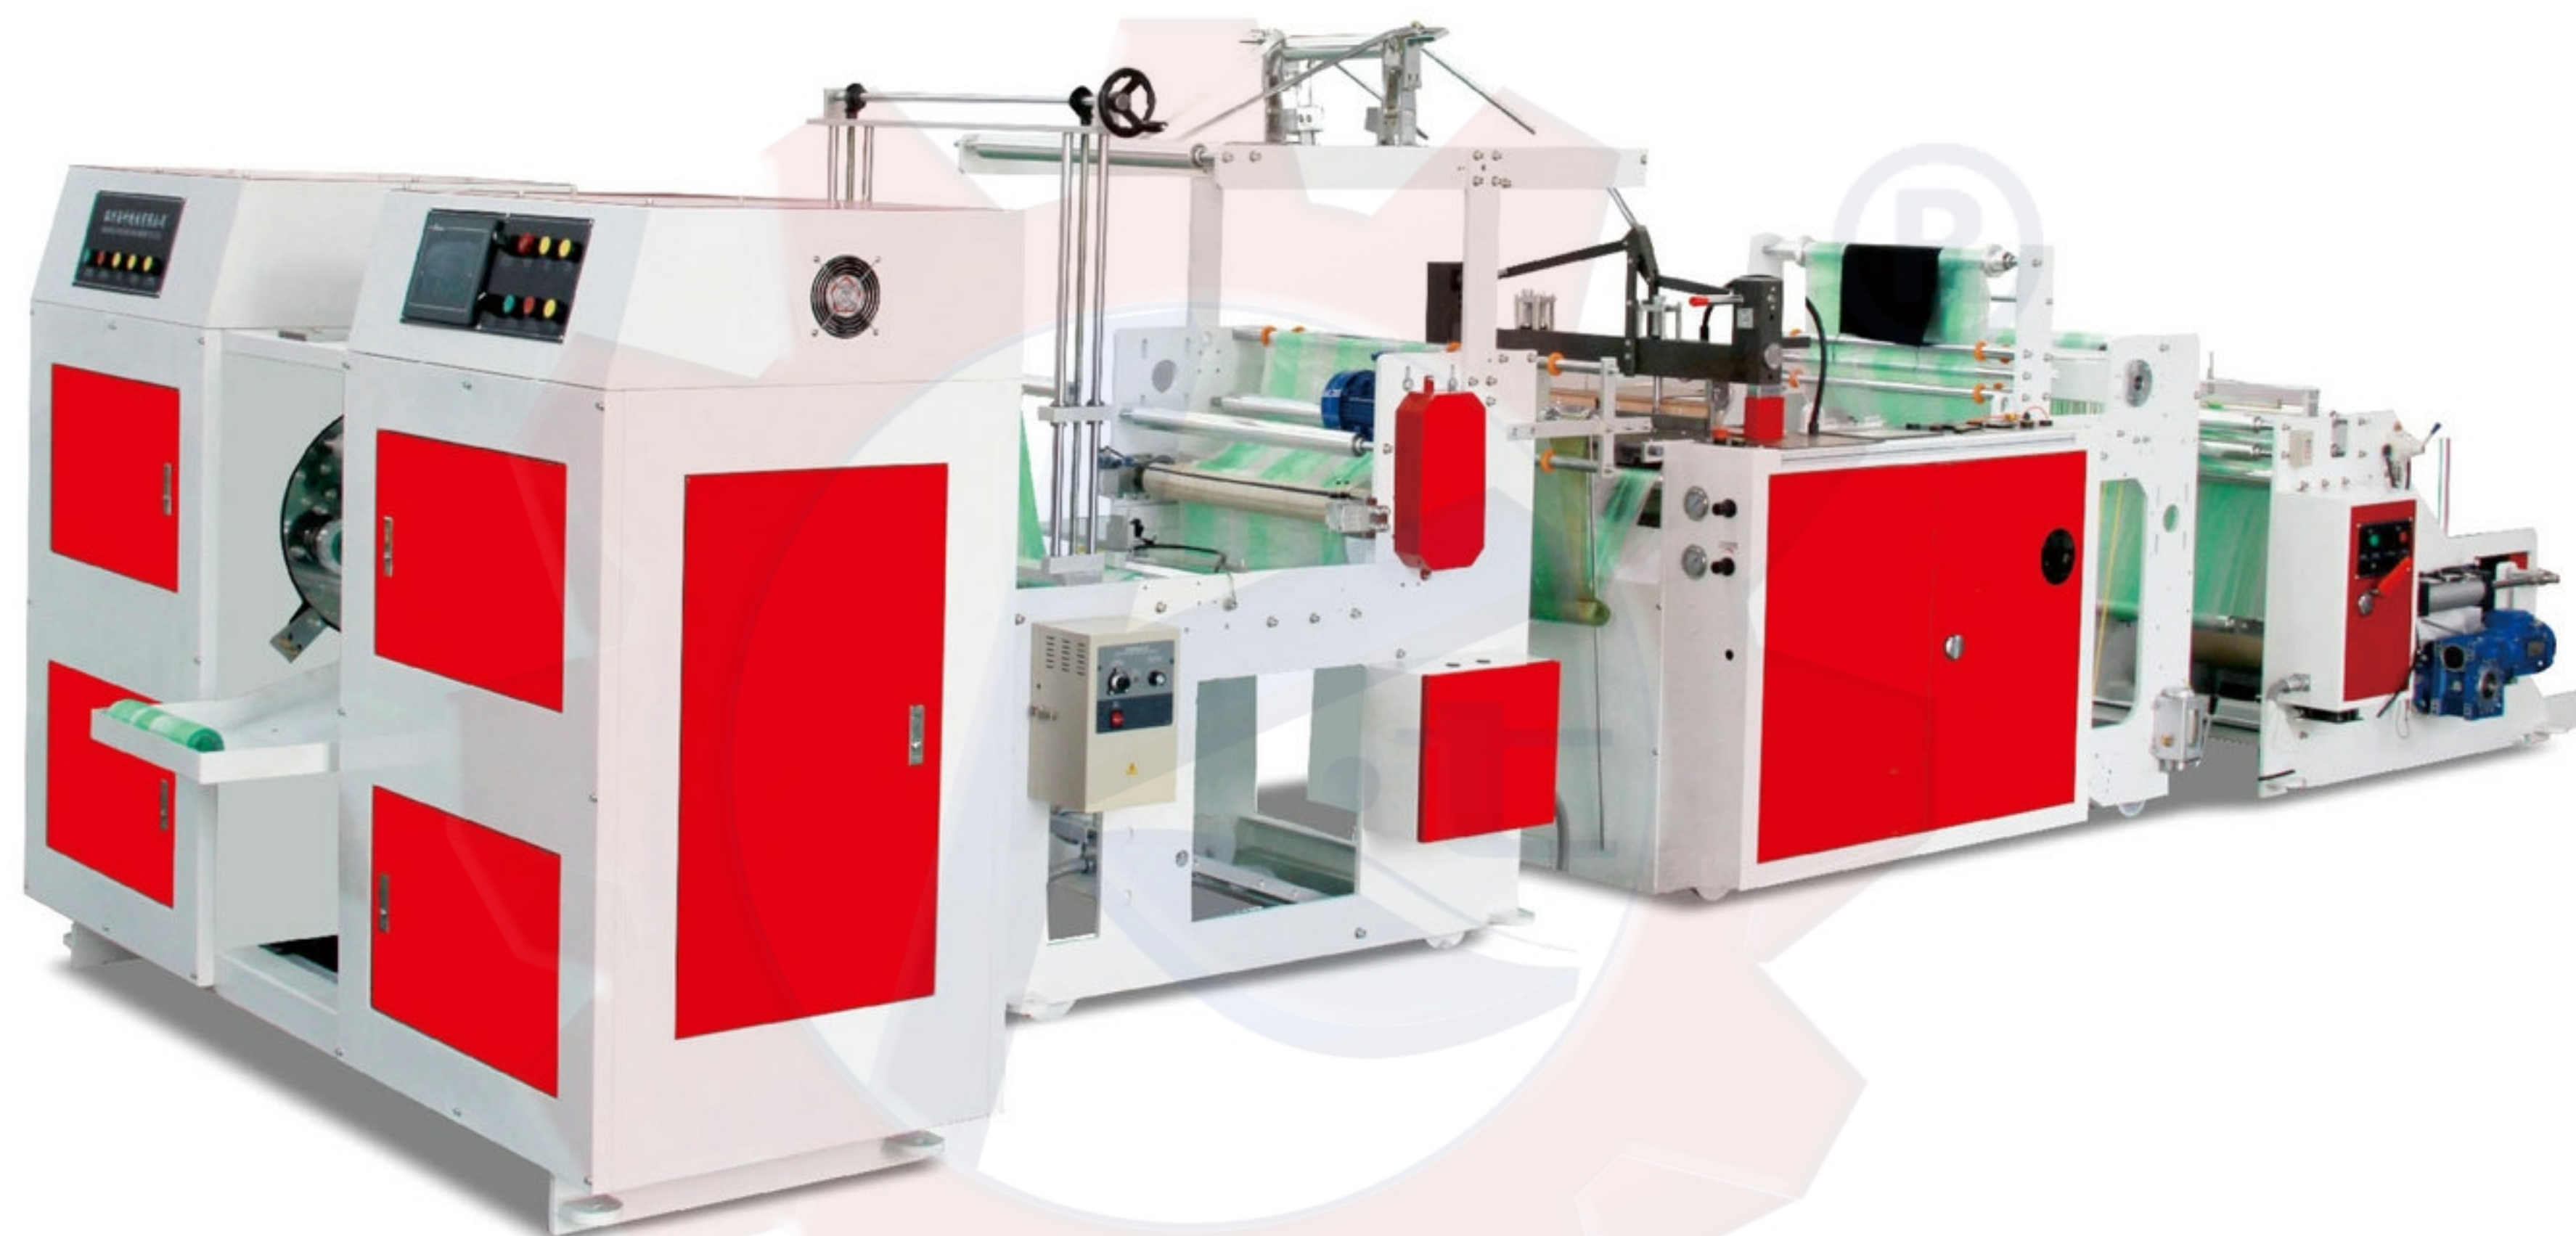

Feature:

This Coreless C Fold Garbage Bag Making Machine is designed to convert plastic films into coreless plastic bag rolls. Such as Plastic Garbage bags, Trash bags, and disposable bags. Each bag on the roll is individually folded and sealed. After a strong bottom sealing, the bags are cut by the perforation knife to ensure the bags can be torn off easily.

Performance and Characteristics:

1. With Double Servo Control System.
2. With Length Control System.
3. With Auto Counting System.
4. With PLC Touch Screen Control System.
5. With Auto Roll Bag Change System.

Main Technical Specification

Model	KTDC-BC 700	KTDC-BC 900	KTDC-BC 1200
Raw Material	HDPE, LDPE, Biodegradable Films, Recycle Materials		
Finial Products	Coreless Bag on Roll (C Fold Flat Bag)		
Production Line	1 Line	1 Line	1 Line
Max. Raw Material Width	600mm	850mm	1100mm
Bag Making Height	300-1500 mm	300-1500 mm	300-1500 mm
Max. Rewind Roll Width	350mm	450mm	550mm
Max. Rewind Roll Diameter	160mm	160mm	160mm
Raw Material Thickness	10-55 Micron / Layer	10-55 Micron / Layer	10-55 Micron / Layer
Bag Making Speed	50-200 bags/min	50-160 bags/min	50-120 bags/min
Material Feeding Speed	80-100m/min	70-90m/min	50-70m/min
Air Compressor	4HP	5HP	5HP
Machine Power	14kw	16kw	18kw
Machine Weight	2800kg	3200kg	3800kg
Machine Size (LWH)	6500 x 2400 x 2000mm	7000 x 2400 x 2000mm	7500 x 2500 x 2200mm

KTDC-CF

Series Fully Automatic with Core Flat Bag on Roll Making Machine



Feature:

This Fully Automatic with Core Flat Bag on Roll Making Machine is designed to convert plastic films into core plastic bag rolls. Such as Plastic vegetable pack bags, food storage bag, fresh keeping bag, snacks fruit storage bags, etc. Each bag on the roll is individually folded and sealed. After a strong bottom sealing, the bags are cut by the perforation knife to ensure the bags can be torn off easily.

Performance and Characteristics:

1. With Double Servo Control System.
2. With Length Control System.
3. With Auto Counting System.
4. With PLC Touch Screen Control System.
5. With Auto T Shirt Bag Puncher.

Main Technical Specification

Model	KTDC-CF 450X2	KTDC-CF 700
Raw Material	HDPE, LDPE	
Final Products	Core Bag on Roll (Flat Bag)	
Product Line	2 Lines	1 Line
Bag Making Width	200 - 400 mm	300 - 600 mm
Bag Making Height	300 - 1000 mm	300 - 1000 mm
Raw Material Thickness	7-35 Micron/Layer	7-35 Micron/Layer
Bag Making Speed	(100-300bags/min) x 2	100-250bags/min
Material Feeding Speed	80-100m/min	70-90m/min
Max. Finished Roll Diameter	180mm	180mm
Max. Raw Material Diameter	Φ900mm	Φ900mm
Core Diameter (Paper/PVC)	ø25~65mm	ø25~65mm
Machine Power	15kw	12kw
Air Compressor	3HP	3HP
Machine Weight	3500kg	3000kg
Machine Size (LWH)	6500 x 1800 x 1900mm	6500 x 1500 x 1900mm

KTDC-CT

Series Fully Automatic with Core T Shirt Bag on Roll Machine



Feature:

This Fully Automatic with Core T Shirt Bag on Roll Machine is designed to convert plastic films into core plastic bag rolls. Such as Plastic vegetable pack bags, food storage bag, fresh keeping bag, snacks fruit storage bags, etc. Each bag on the roll is individually folded and sealed. After a strong bottom sealing, the bags are cut by the perforation knife to ensure the bags can be torn off easily.

Performance and Characteristics:


1. With Double Servo Control System.
2. With Length Control System.
3. With Auto Counting System.
4. With PLC Touch Screen Control System.
5. With Auto T Shirt Bag Puncher.
6. With T Shirt Bag inline Punching Function.

Main Technical Specification

Model	KTDC-CT 450X2
Raw Material	HDPE, LDPE
Final Products	Core Bag on Roll (T Shirt Bag)
Product Line	2 Lines
Bag Making Width	200 - 330 mm
Bag Making Height	330 - 800 mm
Raw Material Thickness	10-35 Micron/Layer
Bag Making Speed	(100-150bags/min) x 2
Material Feeding Speed	70-80m/min
Max. Finished Roll Width	330mm
Max. Finished Roll Diameter	160mm
Max. Raw Material Diameter	Ø900mm
Core Diameter (Paper/PVC)	Ø25~65mm
Machine Power	25kw
Air Compressor	4HP
Machine Weight	4200kg
Machine Size (LWH)	6500 x 2400 x 2000mm

KTDC-D

Fully Automatic Draw Tape Garbage Bag Manufacturing Machine

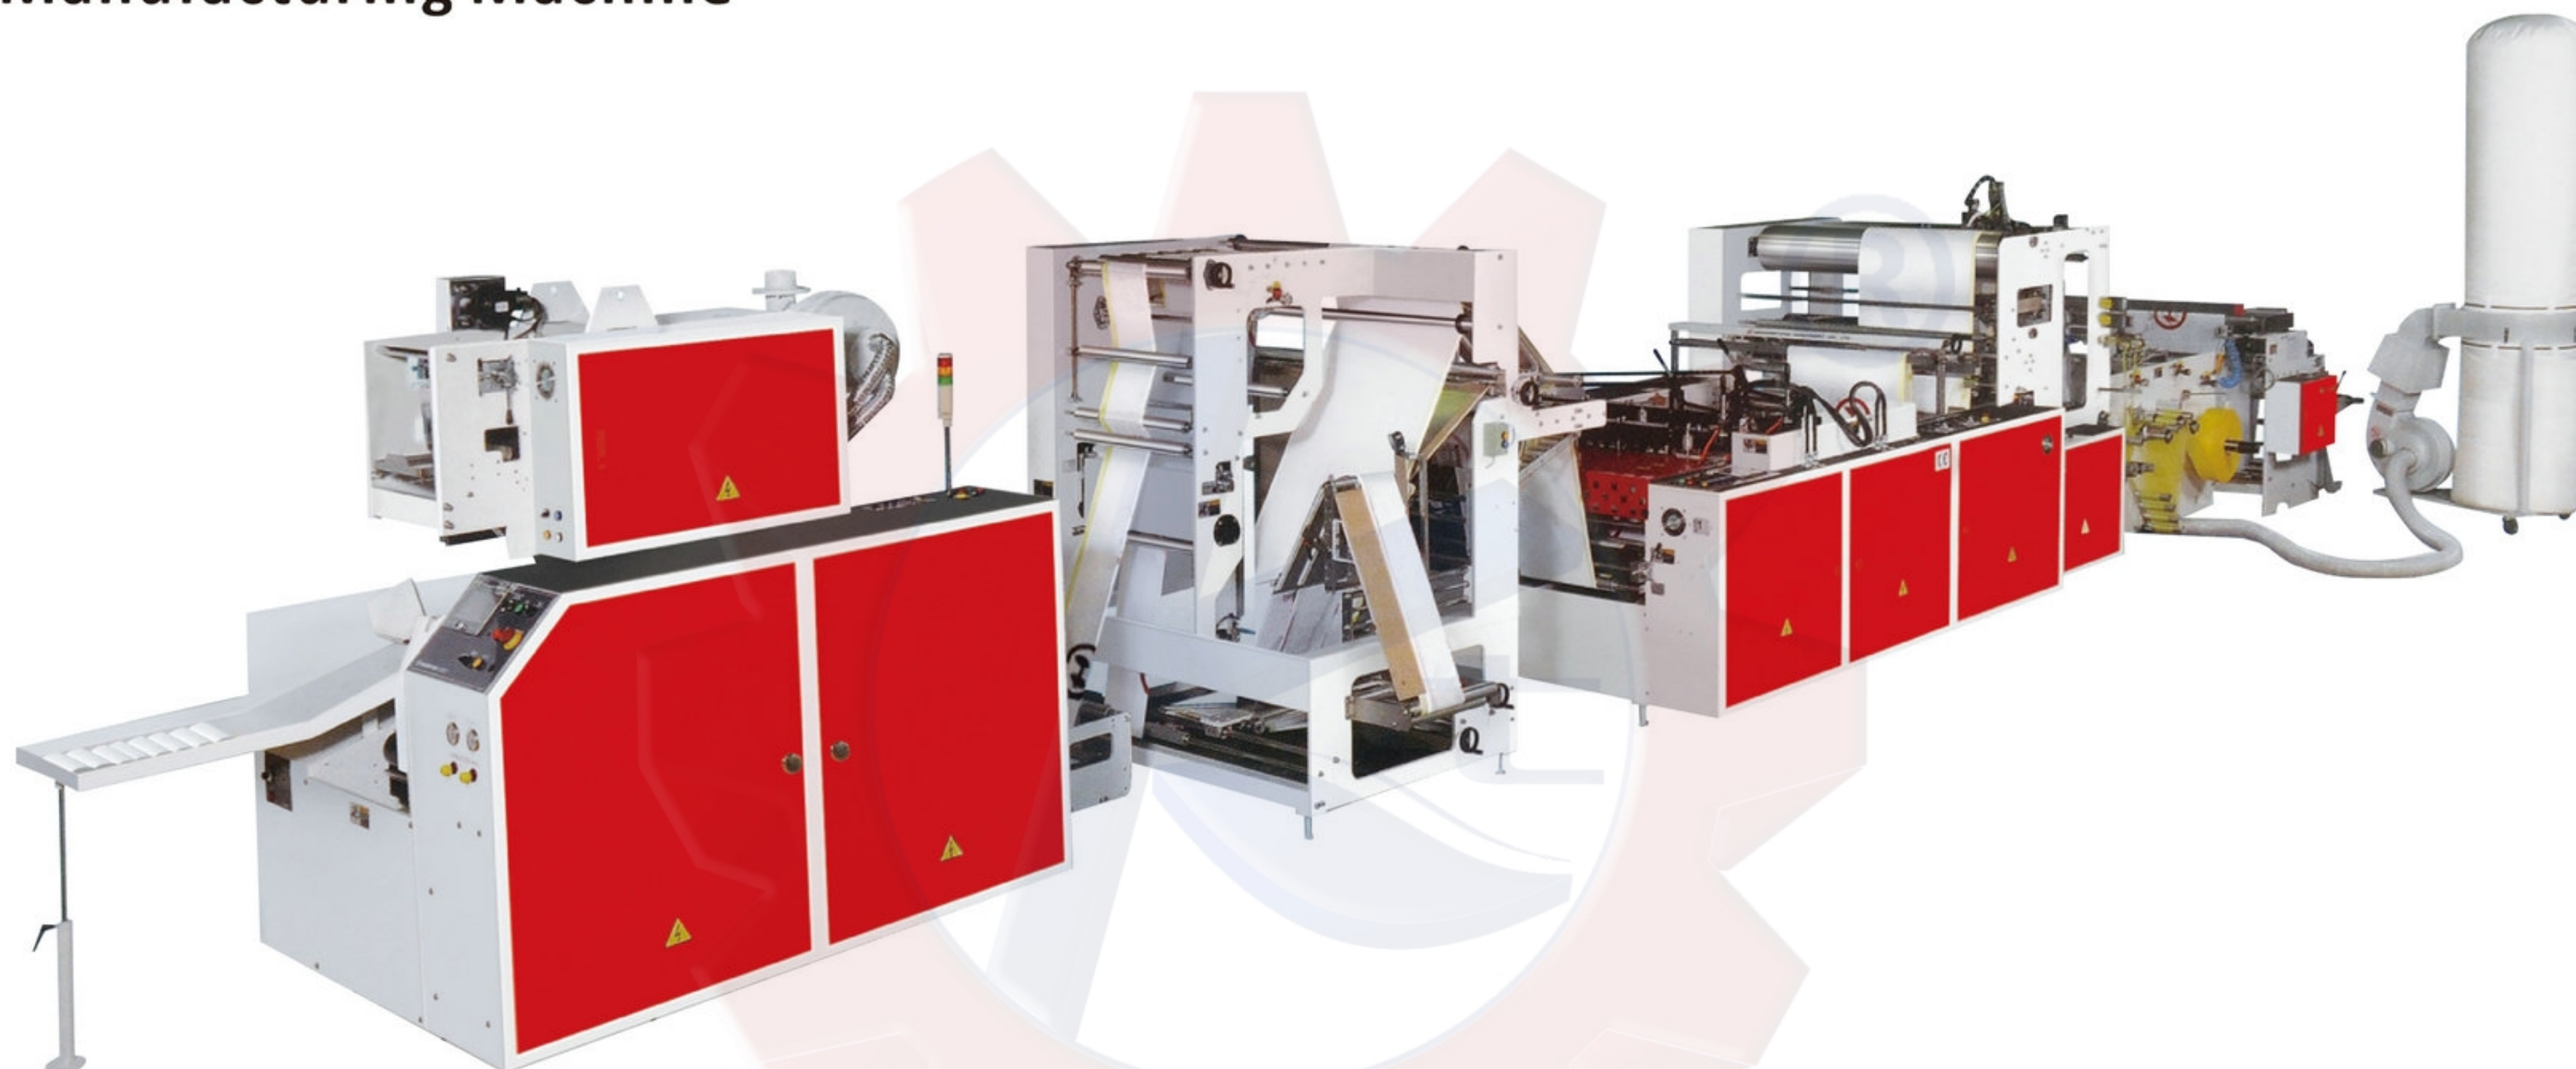

Feature:

This Fully Automatic Draw Tape Garbage Bag Manufacturing Machine is suitable for automatically making plastic drawstring garbage bags.

Performance and Characteristics:

1. With PLC Touch Screen Control System.
2. With Draw Tape Attached Unit.
3. With Servo Motor Drive System.

Main Technical Specification

Model	KTDC-D 1000
Raw Material	HDPE, LDPE
Final Products	Plastic Drawstring Garbage Bag
Bag Making Width	1000 mm
Bag Making Height	900 mm
Raw Material Thickness	10-50 micron/layer
Bag Making Speed	150 bags/min
Max. Draw Tape Width	100 mm
Max. Draw Tape Diameter	600 mm
Max. Finished Roll Width	300 mm
Max. Finished Roll Diameter	Φ 150 mm
Air Compressor	5HP
Machine Power	25kw
Machine Weight	5500kg
Machine Size (LWH)	15000 x 2000 x 2100mm

KTDC-E

Series Fully Automatic With Core Dog Poop Bag Making Machine

KTDC-E

www.ketegroup.com



Feature:

This Fully Automatic With Core Dog Poop Bag Making Machine is designed to convert plastic films into core roll dog poop bag. The bags are cut by the perforation knife to ensure the bags can be torn off easily.

Performance and Characteristics:

- 1.With Servo Control System.
- 2.With Length Control System.
- 3.With Auto Counting System.
- 4.With PLC Touch Screen Control System.

Main Technical Specification

Model	KTDC-E 400
Raw Material	Biodegradable Films, Recycle Materials
Finial Products	Core Dog Poop Bag on Roll (Flat Bag)
Production Line	1 Lines
Max. Bag on Roll Width	60 mm
Max. Bag Making Width	240 mm
Bag Making Length	200-800 mm
Raw Material Thickness	7-35 micron/layer
Material Feeding Speed	80-100 m/min
Air Compressor	1HP
Machine Power	6kw
Machine Weight	1500kg
Machine Size (LWH)	1800 x 1000 x 1800mm

KTDC-G

Series Plastic Glove Making Machine

KTDC-G

www.ketegroup.com



Feature:

This plastic glove making machine is suitable for producing plastic glove with high speed and have single and double line for customer choice.

Performance and Characteristics:

1. With Microcomputer Control System.
2. Material Feeding by Stepping Motor.
3. With Length Control and Auto Counting System.
4. With Transfer Plate.
5. Optional: Auto Tear Off Device.

Main Technical Specification

Model	KTDC-G 500	KTDC-2G 500
Production Line	1Line	2Lines
Glove Making Height	240-350mm	240-400mm
Glove Making Width	350mm	400mm
Glove Making Speed	200-220 pcs/min	(200-220 pcs/min) x2
Material	LDPE HDPE	LDPE HDPE
Film Thickness	0.008-0.02mm/layer	0.008-0.02mm/layer
Total Power	1.0kw	1.5kw
Machine Weight	800kg	1000kg
Machine Size (LWH)	3600 x 1200 x 1400mm	3600 x 1200 x 1600mm

KTDC-I

Series Roll to Sheet Cutting Machine

KTDC-I

www.ketegroup.com



Feature:


This roll to sheet machine is suitable for cutting roller material to piece. Such as nonwoven fabric, plastic film, stickers, paper etc.

Performance and Characteristics:

- 1.With Microcomputer Control System.
- 2.Material Feeding by Stepping Motor.
- 3.With Length Control System.
- 4.With Automatic Counting System.
- 5.With Photo Sensor Checking System.
- 6.Optional: Transfer Plate.

Main Technical Specification

Model	KTDC-I
Max. Cutting Width	600-1500mm
Max. Feeding Length	1000/1500mm
Cutting Speed	30-180pcs/min
Machine Power	3.0kw
Machine Weight(kg)	700kg
Machine Size (LWH)	3300 x 1240 x 1600mm

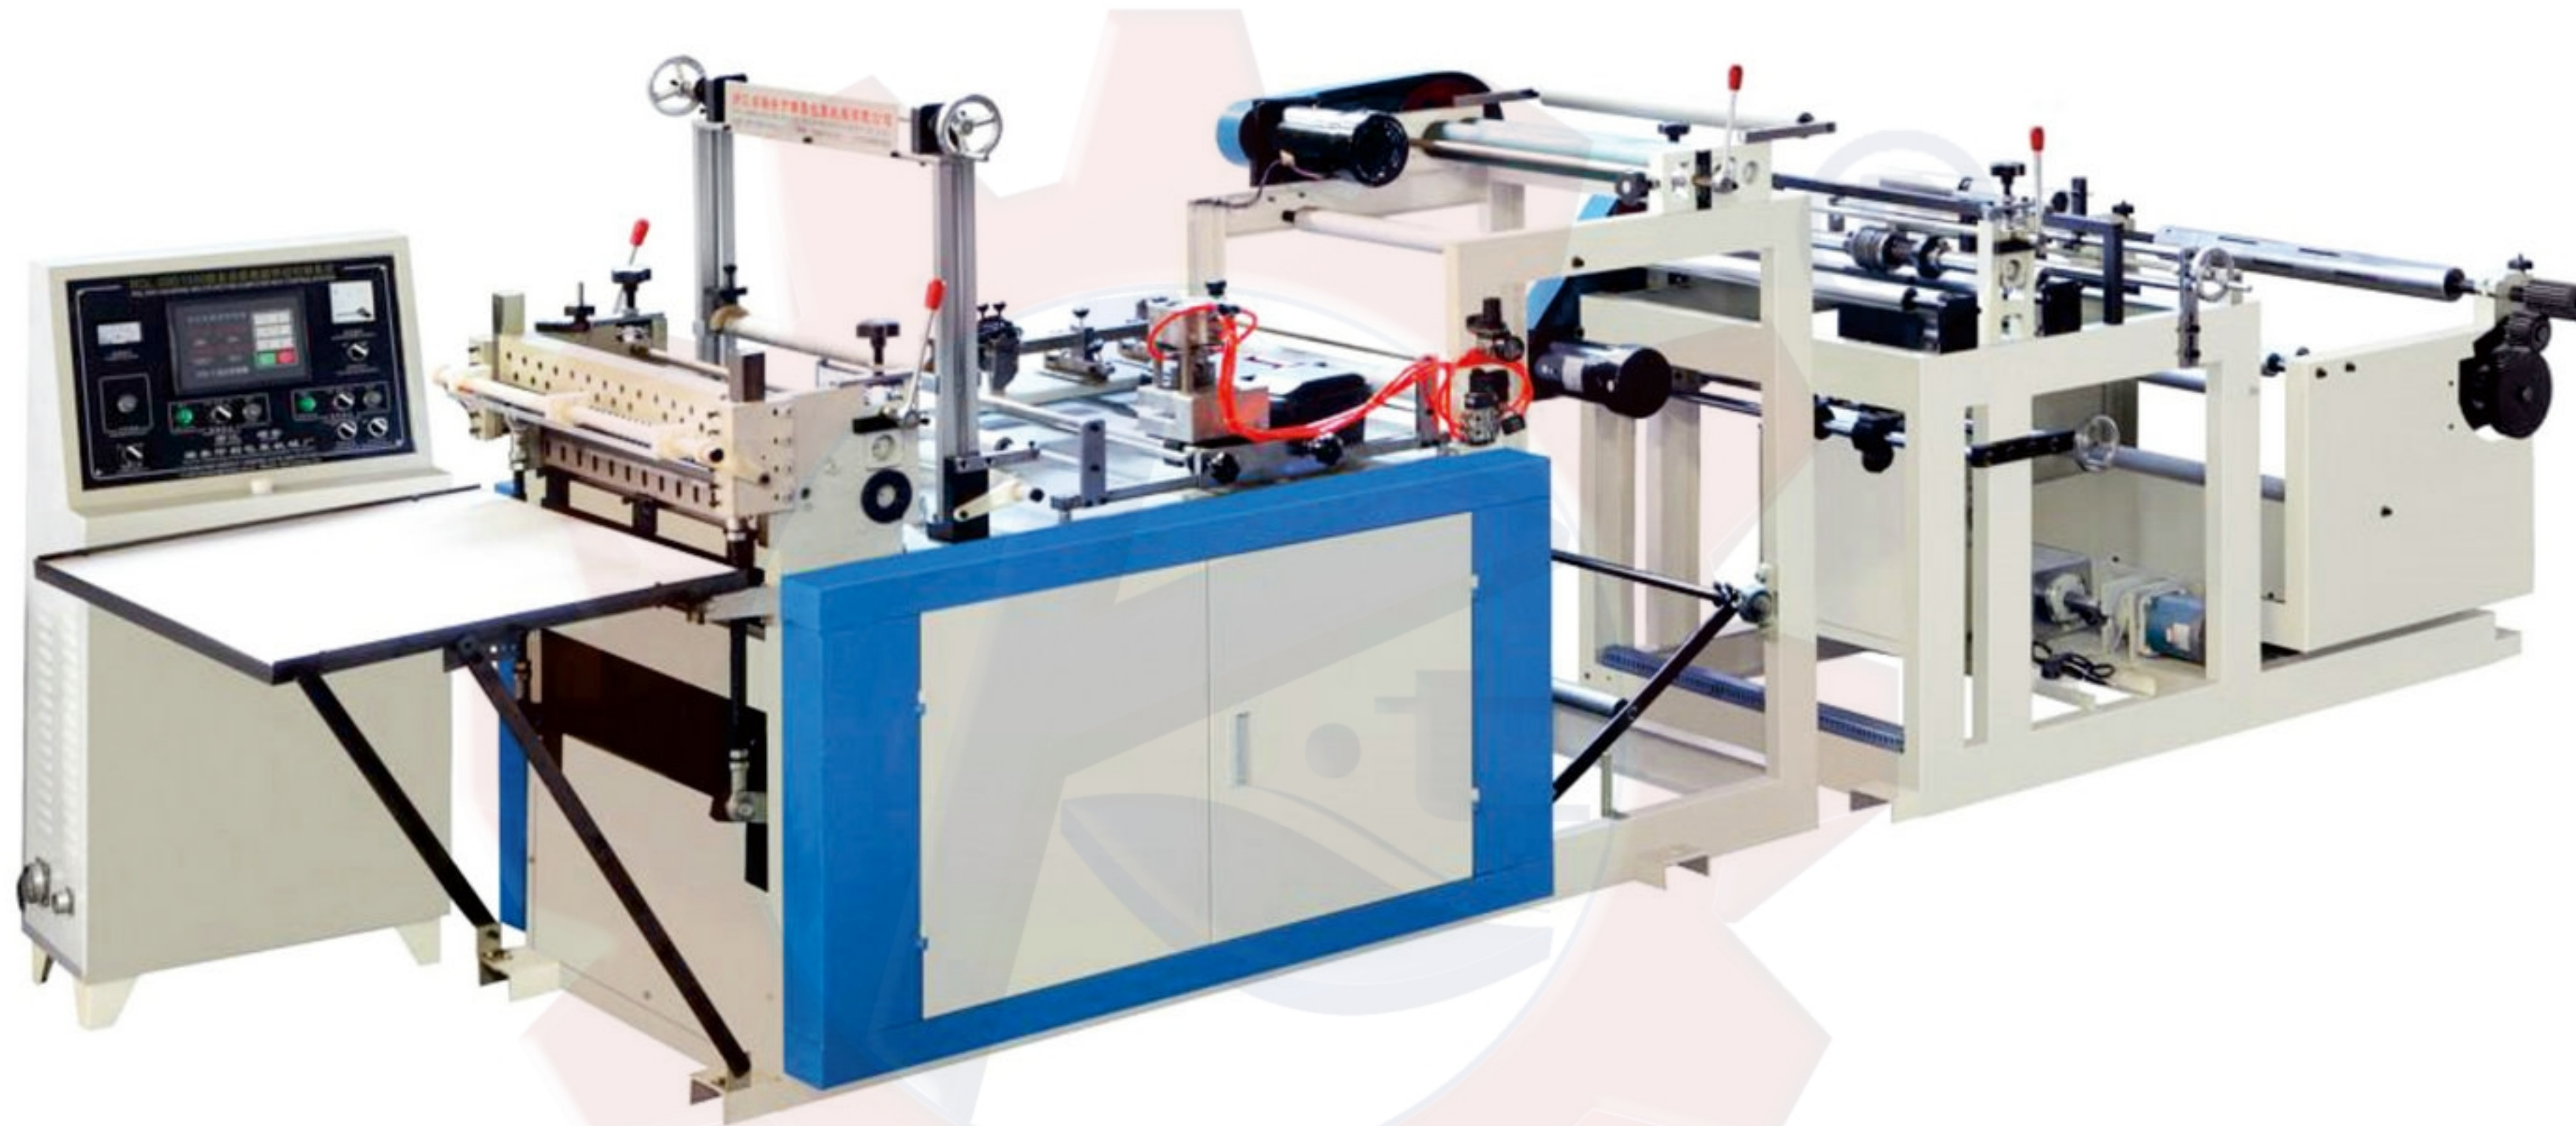

Feature:

This non woven fabric sheet machine is suitable for cutting roller non woven fabric material to piece with D Cut Puncher and ultrasonic sealing.

Performance and Characteristics:

1. With Microcomputer Control System.
2. Material Feeding by Stepping Motor.
3. With Length Control System.
4. With Automatic Counting System.
5. With Photo Sensor Checking System.
6. With Bag Top Sealing System.
7. With Banana Handle Puncher.

Main Technical Specification

Model	KTDC-ID 1200
Max. Cutting Width	1180mm
Max. Feeding Length	1000/1500mm
Cutting Speed	30-120pcs/min
Machine Power	5.0kw
Machine Weight	1200kg
Machine Size (LWH)	5300 x 1600 x 1700mm

KTDC-IH

Series Inline Handle Fixing Non Woven Fabric Sheet Cutting Machine

KTDC-IH

www.ketegroup.com



Feature:

This non woven fabric sheet machine is suitable for cutting roll non woven fabric material to piece with an inline attach soft-loop handle. it is a support machine for manual non woven bag making machine production.

Main Technical Specification

Model	KTDC-IH 1200
Max. Cutting Width	1180mm
Max. Feeding Length	1000/1500mm
Cutting Speed	30-80pcs/min
Machine Power	8.0kw
Machine Weight(kg)	1600kg
Machine Size (LWH)	7800 x 1600 x 1700mm

Performance and Characteristics:


- 1.With Microcomputer Control System.
- 2.Material Feeding by Stepping Motor.
- 3.With Length Control System.
- 4.With Automatic Counting System.
- 5.With Photo Senor Checking System.
- 6.With Bag Top Sealing System.
- 7.With Banana Handle Puncher.
- 8.With Inline Soft Loop Handle Attached System.

KTDC-IS

Series Heat Shrink Sleeve Cutting Machine

KTDC-IS

www.ketegroup.com

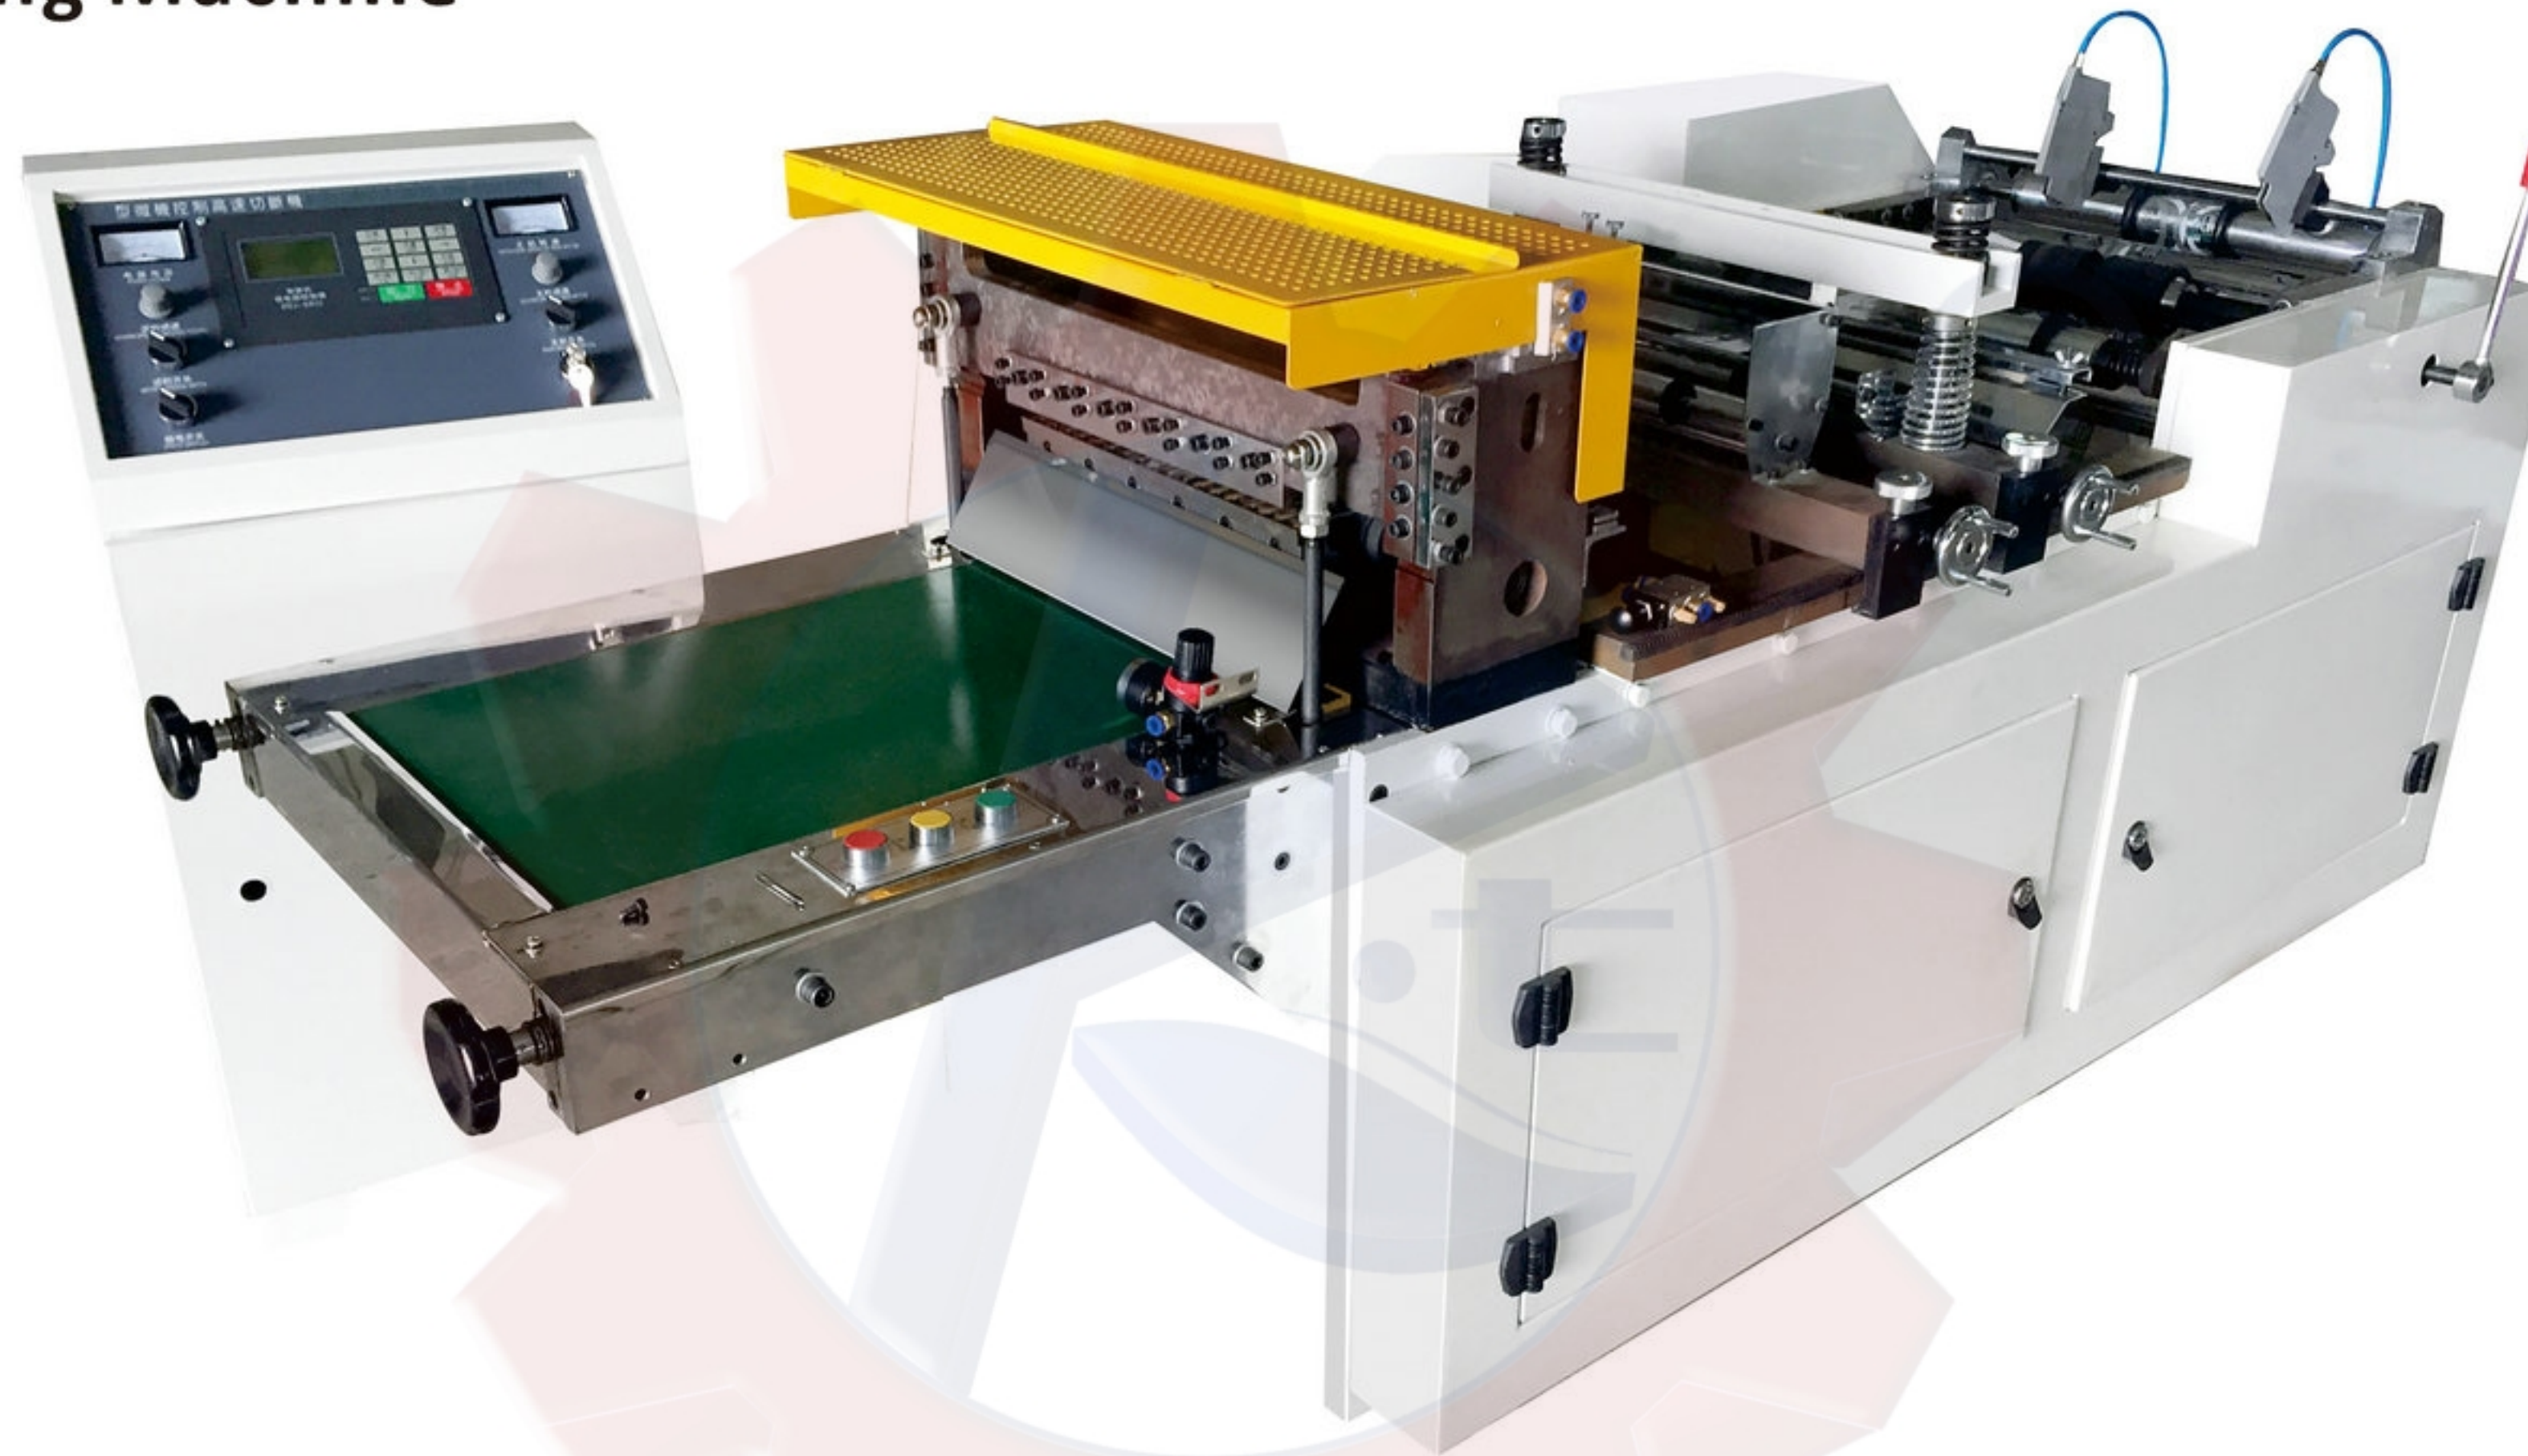

Feature:

This heat shrink sleeves cutting machine is suitable for cutting seamed shrink roll type sleeves to sheet type.

Performance and Characteristics:

1. With Microcomputer Control System.
2. Material Feeding by Stepping Motor.
3. With Length Control System.
4. With Automatic Counting System.
5. With Photo Sensor Checking System.

Main Technical Specification

Model	KTDC-IS350
Max. Material Width	300mm
Unwinding Diameter	Φ600mm
Max. Cutting speed	300times/min
Total Power	1.1Kw
Machine Weight	600kg
Machine Size (LWH)	L2100×W700×H1000mm

KTDC-M

Series PVC High Frequency Welding Machine

KTDC-M

www.ketegroup.com



Feature:

This high-frequency welding machine is used to produce PVC soft film packaging bag applied to business card book inside pages, alum inside pages, CD sleeve, medical infusion bag, drainage bag, urine bag, stationery bag, clothes bag hang tag card, hardware bag, etc.

Performance and Characteristics:

1. With PLC Touch Screen System.
2. Material Feeding by Stepping Motor.
3. With Length Control System.
4. With Automatic Counting System.
5. With Sealing Mold Temperature Control System.
6. With Photo Sensor Checking System.

Main Technical Specification


Model	KTDC-M5	KTDC-M8
Down Electro Polar Size	500x600mm	500x600mm
Max. Mold Size	450x330mm	550x450mm
Speed	30-40 Times/min	30-40 Times/min
High Frequency Output	5kw	8kw
Oscillation Frequency	27.12MHZ	27.12MHZ
Max Input	6kva	8kva
Oscillation Tube	7T85R8	7T85R8
Rectifier Tube	HVP20	HVP20
Machine Weight	1500kg	1500kg
Machine Size (LWH)	4500 x 1300 x 1600mm	4500 x 1300 x 1600mm

KTDC-MZ

Series Inline Add Slider PVC Zip Lock Bag Making Machine

KTDC-MZ

www.ketegroup.com

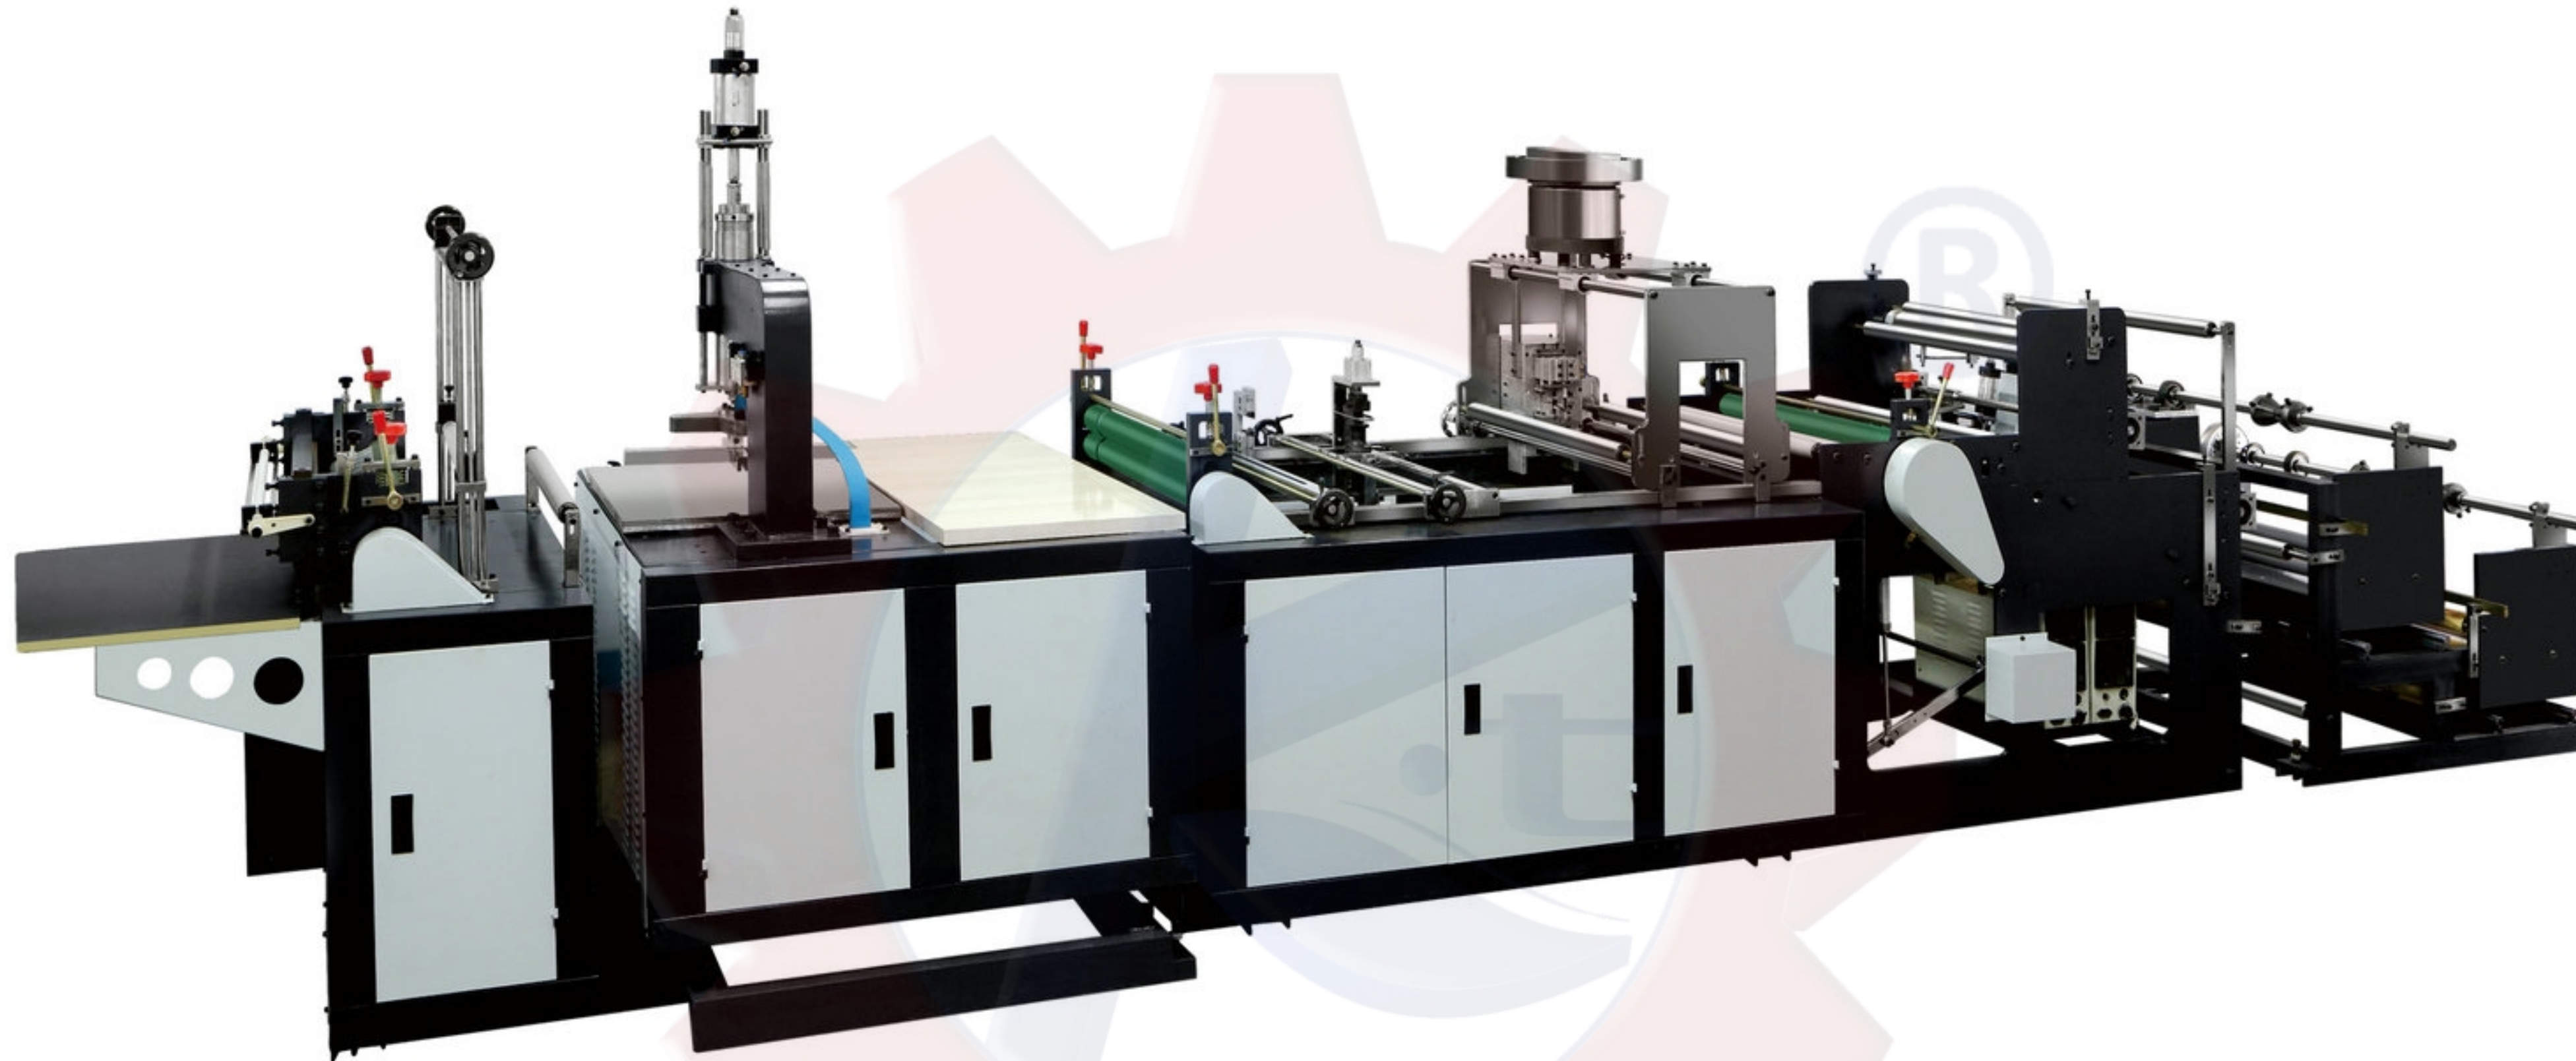

Feature:

This PVC Zip Lock Bag Making Machine is use for producing PVC soft film packaging bag which is applied to zipper bag, business card book inside pages, alum inside pages, CD sleeve, medical infusion bag, drainage bag, urine bag, stationary bag, clothes bag, hangtag card, hardware bag etc.

Performance and Characteristics:

- 1.With Computer Length Control System.
- 2.With Auto Sensor Checking System.
- 3.With Auto Spark Protect System.
- 4.With Auto Zipper Attached System.
- 5.With Auto Zipper Slider Attached System.
- 6.With Double EPC Control System.
- 7.With Automatic Tension Control System.

Main Technical Specification

Model	KTDC-MZ
High Frequency Output	5kw
Oscillation Frequency	27.12MHZ
Max Input	6kva
Oscillation Tube	7T85R8
Rectifier Tube	HVP20
Down Electro Polar Size	500x600mm
Max. Mold Size	450x500mm
Speed	40 bags/min
Machine Weight	3500kg
Machine Size (LWH)	7500 x 1300 x 1600mm